




VehiclePro Prewash RM 803 Classic

VehiclePro Prewash RM 803 Classic: powerful but gentle high-pressure pre-spraying agent. Speeds up the softening and removal of oils and greases as well as insect residue.

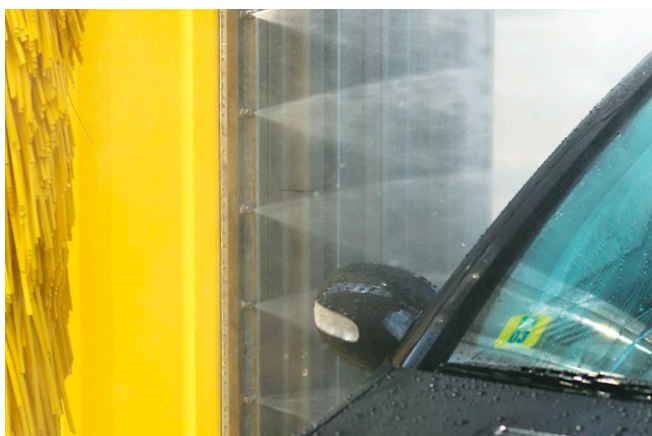

Properties

- Effective prespraying agent for prewashing cars and utility vehicles
- Allows grease, oil, emissions and insect soiling to swell and dissolves these reliably
- Significantly improves the cleaning result of the following cleaning steps.
- Cleaning action in all temperature ranges
- Rapidly effective
- Gentle on materials
- Tensides biodegradable in accordance with EEC 648/2004
- Quick oil and water separation in the oil separator (easily separable=asf)
- NTA-free

Application areas:

- Car dealership and garage:** Car de-waxing
- Car dealership and garage:** Vehicle cleaning
- Municipal:** Car/engine wash
- Self-service wash bays:** Cars, commercial vehicles, bicycles

Usage options

- High-pressure cleaner
- Car washes
- Self-service wash bays
- Spray units

Container sizes	Part number
10 l	6.296-061.0
20 l	6.296-062.0
200 l	6.296-063.0

pH



Application:**High-pressure cleaner**

- Apply primary mixture with fresh water.
- Set the dosage and temperature on the device
- Clean object.
- Rinse surface well with clear water.

Car washes

- Insert the product into the system.
- Adjust dosage on the device.
- Clean object.
- Then run through washing programme.

Self-service washing station

- Insert the product into the system.
- Adjust dosage on the device.
- Clean object.
- Rinse surface well with clear water.

Spray unit

- Combine the product with the appropriate dosage and fresh water.
- Wet object completely with the product.
- Allow to soak.
- Contact time 1-5 minutes, depending on the degree of soiling.
- Rinse surface well with clear water.

Instructions for use:

- Test on an inconspicuous part for material compatibility.
- Do not let the cleaning solution dry out.
- Store away from frost.

Warnings and safety recommendations according to EC Directives:

- Danger
- H290 May be corrosive to metals
- H314 Causes severe skin burns and eye damage
- P280 Wear protective gloves/protective clothing/eye protection/face protection.
- P305 + P351 + P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
- P303 + P361 + P353 IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water [or shower].
- P310 Immediately call a POISON CENTER/doctor.
- P405 Store locked up.
- P501a Dispose of contents/container in accordance with local/regional/national/international regulations.

Further information:

- Material Safety Data Sheet (MSDS)

Dosage and yield:

Contents:	Cleaning method:	Primary mixture:	Dosage:	Soiling:	Yield:
1000 ml	High-pressure cleaner	1+2	1.5-6 %	heavy	200 m ²
1000 ml	Commercial vehicle washes		0.5-2 %	heavy	100 m ²
1000 ml	Self-service wash bays	1+2	1.5-6 %	heavy	36 m ²
1000 ml	Spray units		2 %	medium-strong	550 m ²

Please contact us for more information:

Alfred Kärcher SE & Co. KG

Alfred-Kärcher Straße 28-40
71364 Winnenden

Phone +49(0)7195-14-0
Fax +49(0)7195-14-2212

www.kaercher.com